

S4000 SERIES STRIP (MELTING) FUSES O TYPE

Specifications:

Current Rating: 30-175A

Voltage Rating : 32 VDC

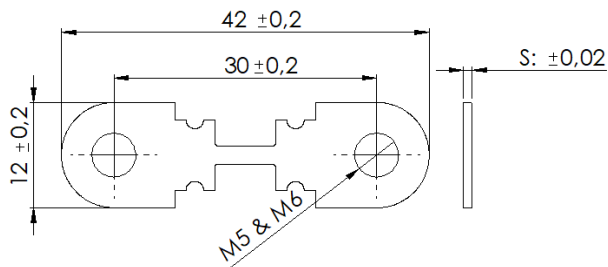
Material: Special alloy for fuse

Connection: M5 & M6 Bolts, distance 30 mm

ELV

RoHS
Compliant**Description :**

- Main circuit protective non-housed fuse strips for vehicles.
- M5 or M6 Connection holes, spaced 30 mm.
- For Volkswagen, Audi, Skoda and other vehicles

Dimensions : Dimensions are in mm**Time-Current Characteristics:**

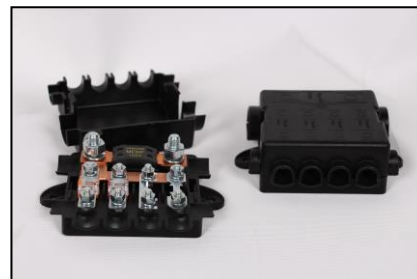
% of Rating	Opening Time Min. / Max. (s)
125	360.000 s / -
300	0,1 s / 10 s
600	0,02 s / 1,0 s
1000	0,01 s / 0,3 s

Ratings:

Part No	Rated Current	Material Thickness "S"	Cold Resistance
S4030-A or B	30 A	0,40 mm	1,34 mΩ
S4040-A or B	40 A		0,82 mΩ
S4050-A or B	50 A		0,63 mΩ
S4060-A or B	60 A		0,59 mΩ
S4070-A or B	70 A		0,57 mΩ
S4080-A or B	80 A	0,80 mm	0,43 mΩ
S4100-A or B	100 A		0,34 mΩ
S4110-A or B	110 A		0,31mΩ
S4125-A or B	125 A		0,29 mΩ
S4150-A or B	150 A		0,24 mΩ
S4175-A or B	175 A		0,22 mΩ

Ordering Information :

Part Number	Hole Size	Packing Size
S4xxxA-DT100	M5	100 pcs. in a Plastic Bag
S4xxxA-DT500	M5	500 pcs. in a Plastic Bag
S4xxxA-DT1000	M5	1.000 pcs. in a Plastic Bag
S4xxxB-DT100	M6	100 pcs. in a Plastic Bag
S4xxxB-DT500	M6	500 pcs. in a Plastic Bag
S4xxxB-DT1000	M6	1.000 pcs. in Plastic Bag

Related Products :MidiType Fuse Holder
(Product codes: FH1001)Combi Fuse Holder
(Product codes: FH1005-A & FH1005-B)